

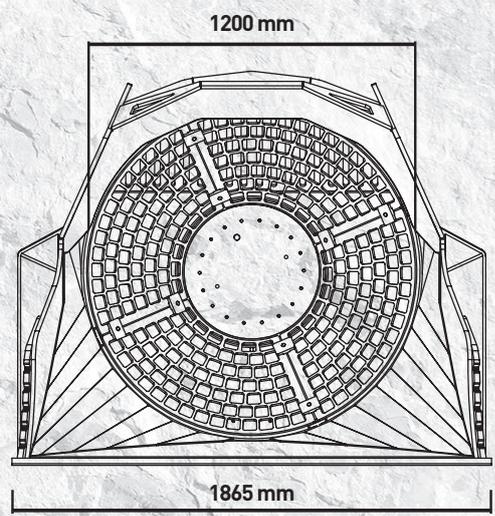


MB-LS170

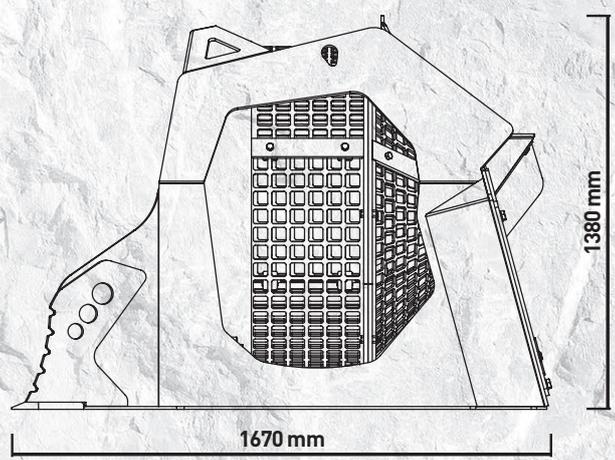

“Innovative and Handy”

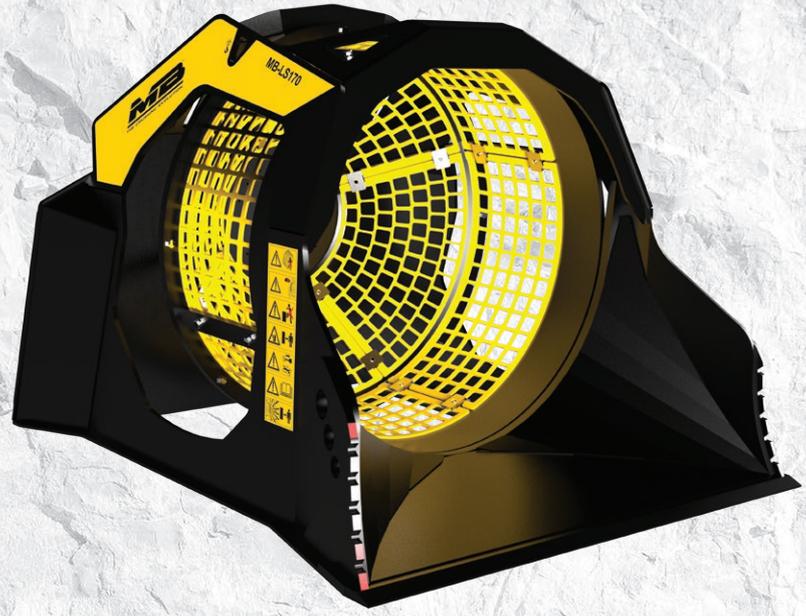

Ideal for natural material selection either pre or post crushing stage, the screening MB-LS170 allows to cut down up to 60% of the crushing time and to recover material suitable to the type of processing desired to handle it in the best way.

Particularly suitable for wheel loader and backhoe from 6.5 to 11 ton.



PRIMARY SELECTION:

WASTE MATERIAL
DEMOLITION MATERIAL
EXCAVATION FILLING MATERIAL
STONY GROUND RECLAIM
PEBBLES IN STREAMS
DEBRIS IN BEACHES
NATURAL STONES CLEANING

SPECIFICATIONS

EQUIPMENT	LOAD CAPACITY	BASKET DEPTH	GRID DIAMETER	DIMENSIONS
BACKHOE LOADER / LOADER ≥ 6,5 ≤ 11 Ton	1,10 m ³	890 mm	1200 mm	1670 x 1865 H 1380 mm
OIL FLOW	PRESSURE	COUNTER PRESSURE DRAIN	WEIGHT	SPEED/MIN.
60 l/min.	150 bar	-	1,35 Ton	25/35 min/max

ACCESSORIES

RECOMMENDED SPARE PARTS KIT	FIXED COUPLER	QUICK FEMALE COUPLER	HOUR METER	
MBLS17012	-	-	804MBBV01	
				24 MONTHS WARRANTY
				WA241700