



MB-R800

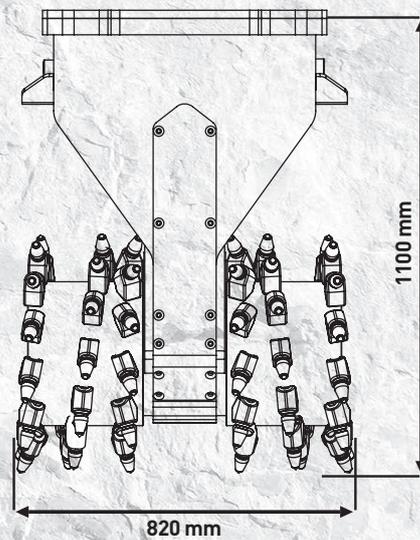

“Agile and efficient”

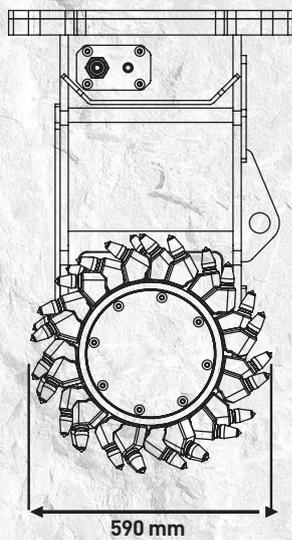

Suitable for any application requiring hard materials to be cut or ground away.

MB drum cutter MB-R is suitable for concrete wall and surface profiling, trenching, rock excavation, demolition and dredging and for any use in urban areas and also on restricted jobsites.



AREAS OF APPLICATION

- DEMOLITION
- REFURBISHMENT
- TRENCHING
- QUARRYING
- EXCAVATING
- SPECIAL FOUNDATIONS
- ROAD BUILDING

SPECIFICATIONS

RECOMMENDED EXCAVATOR	RECOMMENDED OIL FLOW (MIN)	INLET MAXIMUM PRESSURE	DRAIN-OUT MAXIMUM PRESSURE
≥ 10 < 22 Ton	200-300 l/min.	350 bar	4 bar
OUTPUT TORQUE	PICK FORCE	WEIGHT	SPEED/MIN.
10000 Nm	33900 N	1 Ton	55/80 min/max

ACCESSORIES

RECOMMENDED SPARE PARTS KIT	FIXED COUPLER	QUICK FEMALE COUPLER
MBR800006	FCR800000	MBR800000
24 MONTHS WARRANTY		
WA24R800		

The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice. References to excavator weights are approximate and many may be subject to changes. Consider a 20% tolerance.